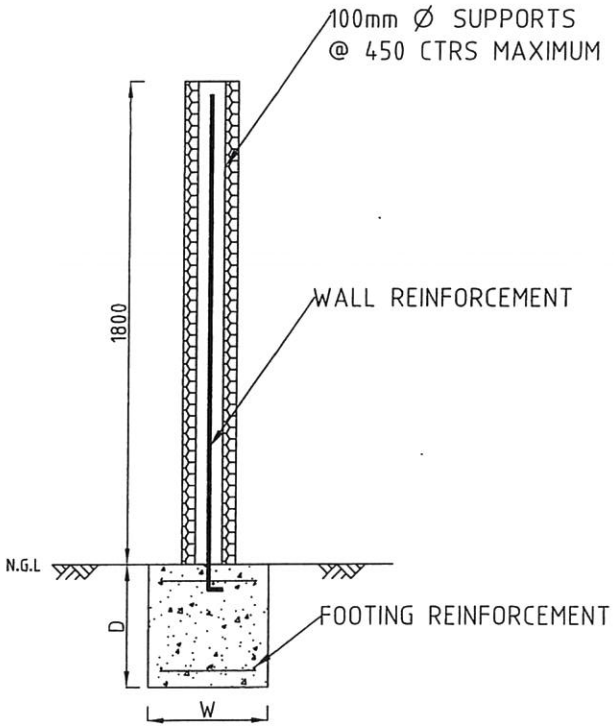

REGION	TERRAIN CATEGORY	WALL REINFORCEMENT	DEPTH OF FOOTING (D)	WIDTH OF FOOTING (W)	FOOTING REINFORCEMENT
A	2.0	1/N12 BAR	600	600	3L11-TM TOP & BOTTOM
	2.5	1/N12 BAR	600	600	3L11-TM TOP & BOTTOM
	3.0	1/N12 BAR	450	450	3L11-TM TOP & BOTTOM
B	2.0	1/N12 BAR	600	600	3L11-TM TOP & BOTTOM
	2.5	1/N12 BAR	600	600	3L11-TM TOP & BOTTOM
	3.0	1/N12 BAR	600	600	3L11-TM TOP & BOTTOM
C	2.0	-	N/S	N/S	3L11-TM TOP & BOTTOM
	2.5	-	N/S	N/S	3L11-TM TOP & BOTTOM
	3.0	1/N16 BAR	600	600	3L11-TM TOP & BOTTOM

DRAWING REVISIONS

PRELIMINARY FOR CLIENT APPROVAL	KJP	JAN15

REFERENCE DRAWINGS

COPYRIGHT
THESE DESIGNS, PLANS AND INFORMATION ARE COPYRIGHT AND ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART OR TO BE USED ON ANY PROJECT WITHOUT THE WRITTEN PERMISSION OF SUMMERMORE PTY LTD
DO NOT SCALE FROM

SIGNED APPROVAL

APPROVED		
RPEQ	6715	
REVIEWED		
DESIGNED	RAB	JAN2015
DRAWN	KJP	JAN2015
SCALE	AS SHOWN	

Summermore Pty Ltd
Consulting Engineers
ACN: 108 859 433
ABN: 42 108 859 433
ron@summermore.com.au
www.summermore.com.au
PO Box 1671
Browns Plains BC, QLD, 4118

CLIENT
NRG Building Systems

Unit 4 32-38 Dover Drive
West Burleigh
QLD 4220

PROJECT
NRG FENCE

TITLE
FOOTING DETAIL & REQUIREMENTS

DRAWING NUMBER
15-8514-S01

REV